


HB-Fix Lip-Seal

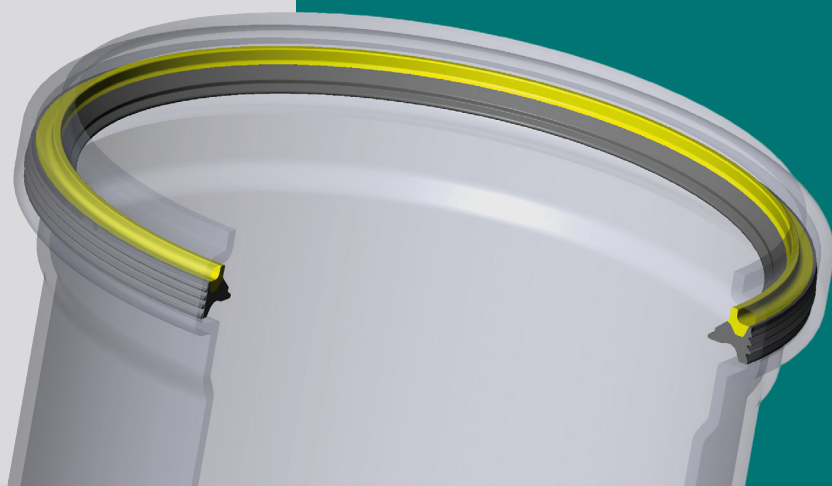

APPLICATION

Pipes and Fittings

- PVC sewer pipes and fittings according EN 1401-1, DIN 19534
- PP sewer pipes and fittings according EN 1852

Material

Hardness: 60 ± 5 IRHD
TPE-V (seal) / PP (fix ring)
EN 681-2 WT / WH (oil resistant)

Performance of the seal

- locked-in-gasket
- automatic assembly possible
- low insertion force
- reliable function under extreme condition (2.5 bar)
- long life time performance, low relaxation
- Kiwa approval according BRL 2020

Bode GmbH

- Material approval and production inhouse
- High consistency of all properties confirmed by external surveillance: MPA and Kiwa

DIMENSIONS - mm

DN/OD (EN 1401/1451 EN 1852)	DN (DIN 19534/19560)	Ø D (mm)	b (mm)	h (mm)
110	100	121.60 ± 0.4	7.80 ± 0.2	8.60 ± 0.4
125	125	138.30 ± 0.4	9.00 ± 0.2	9.80 ± 0.4
160	150	175.10 ± 0.4	10.20 ± 0.2	11.00 ± 0.4
200	200	216.80 ± 0.5	11.90 ± 0.2	12.00 ± 0.4
250	250	274.90 ± 1.0	17.20 ± 0.4	19.00 ± 0.4
315	300	341.80 ± 1.2	18.50 ± 0.4	20.00 ± 0.8
400	400	430.90 ± 1.2	20.00 ± 0.6	23.60 ± 0.9
500	500	539.10 ± 2.4	24.00 ± 0.7	28.80 ± 0.9

Subject to modifications and amendments – © Bode GmbH, Henstedt-Ulzburg 2018

